CEMENT AND CONCRETE REFERENCE LABORATORY PROFICIENCY SAMPLE PROGRAM

Final Report Concrete Proficiency Samples Number 179 and Number 180

June 2016



CCRL CEMENT AND CONCRETE REFERENCE LABORATORY

www.ccrl.us



June 7, 2016

To: Participants in the CCRL Portland Cement Concrete Proficiency Sample Program

SUBJECT: Concrete Proficiency Samples No. 179 and No. 180

Enclosed is your copy of the final report on the test results for the CCRL Concrete Proficiency Samples which were distributed in April 2016.

This report consists of a statistical Summary of Results, a set of general Scatter Diagrams and associated detailed information. The Table of Results with test results and ratings for your laboratory can be viewed and printed at our website located at: <u>http://ccrl.us/</u>.

The CCRL Proficiency Sample Programs are intended for internal use by the laboratory as a tool to identify potential problems in laboratory procedures or test equipment and to initiate remedial actions. These programs are designed to complement the CCRL Laboratory Inspection Program as part of a total quality system. Care should be taken when using this program for any other purpose.

Additional samples of these two materials and other CCRL samples are available for purchase. These samples may be useful for equipment verification, technician training, and research. Contact CCRL for availability and price.

It is presently anticipated that the next Concrete Proficiency Samples will be distributed in October 2016.

Sincerely,

Polin K. Haust

Robin K. Haupt Supervisor, Proficiency Sample Programs Cement and Concrete Reference Laboratory

To: Participants in the CCRL Concrete Proficiency Sample Program

FROM: Robin K. Haupt, Supervisor, PSP

SUBJECT: Explanation of Final Report on Results of Tests on Portland Cement Concrete Proficiency Samples No. 179 and No. 180

This letter, and the material included with it, constitutes the final report and summary of results for the current pair of Concrete Proficiency Samples that were distributed in April 2016. This material includes a statistical Summary of Results, and a set of general Scatter Diagrams. If your laboratory was a participate in this program a Table of Laboratory Results (lab data and ratings) for your laboratory can be viewed and printed on the CCRL website

An explanation of the program is contained in the paper: "Statistical Evaluation of Interlaboratory Cement Tests" by J. R. Crandall and R. L. Blaine <u>View Document</u>, and "Statistical Aspects of the Cement Testing Program" by W.J. Youden <u>View Document</u>, which can be found in Volume 59, Proceedings of the 62nd Annual Meeting of the Society, June 25, 1959, American Society for Testing and Materials.

Table of Results

Each laboratory receives an individualized Table of Results that contains laboratory test results and ratings. Each line of the test information shows the test title and the reporting unit in the first two columns. After that it lists in order, the laboratory's test results for the odd and even numbered samples, overall averages for the odd and even numbered samples, and the laboratory's ratings for the odd and even samples. Please note that individual laboratory ratings were not given for temperature of concrete.

The ratings for each individual laboratory were determined in the manner described by Crandall and Blaine using a rating scale of 1 to 5 instead of 0 to 4. The ratings have no valid standing beyond showing the difference between the individual laboratory result and the average for a particular test.

The following table details the relationship between the ratings and the averages.

Ratings	Range (Number of Standard Deviations)	Number (Per 100) of Laboratories achieving the rating ¹
5	Less than 1	69
4	1 to 1.5	18
3	1.5 to 2	9
2	2 to 2.5	3
1	Greater than 2.5	1

The sign of the rating indicates whether the result reported was greater or less than the average obtained.

¹Youden, W.J., "Statistical Aspects of the Cement Testing Program", Volume 59, Proceedings of the 62nd Annual Meeting of the Society, June 25, 1959, American Society for Testing and Materials.

In cases where some laboratories' results are eliminated, averages, standard deviations, coefficients of variation, and the ratings of the remaining laboratories' results, are recalculated using the data remaining after the elimination. Since the laboratory ratings given are the results from this one series of tests, you need not attach too much significance to a single low rating, or pair of ratings, from this one series. A continuing tendency to get low ratings on several pairs of samples should lead a laboratory to consider the types of error, systematic and random, that contribute to ratings that are low. Systematic error, which is indicated by low ratings with the same signs on each pair of samples, means a consistent error is occurring in equipment and/or test procedures. One indication of random error is low ratings on both samples with different signs. Since systematic error occurs with more regularity, its cause is generally easier to find than the cause of random error.

Summary of Results

The Summary of Results provides the statistical summary for each test. Each line lists the test, the number of participants represented, the averages, standard deviations and coefficients of variations. When necessary the data from the test is represented in two lines, one line with all results reported, and then a second line with invalid and outlying results omitted. Sometimes two or more recalculations are required to eliminate all outliers from the test. In these cases, all of the laboratories omitted in previous recalculations are also omitted in subsequent ones. Results omitted are values that are more than three standard deviations from the mean of one or both samples. Often, elimination of these outlying results has little effect on the average, but may have a more pronounced effect on the standard deviation and coefficient of variation.

Scatter Diagrams

General scatter diagrams are supplied with this report. Crandall and Blaine describe the manner of preparing scatter diagrams, and their interpretation, in the paper published in the 1959 ASTM Proceedings.

Using the results received from each laboratory, a scatter diagram is generated for each test method by plotting the value for the odd numbered samples on the *X*, or horizontal axis, against the value for the even numbered samples on the *Y*, or vertical axis. Vertical and horizontal dashed lines, which divide the diagrams into four sections or quadrants, place the average values for the odd and even numbered samples, respectively. The first line of print under the diagram includes the test number, as given on the data sheet, the test title, and the number of data points on the diagrams. The number of plotted points may not agree with the total number of data pairs included in the analysis because a few points may be off the diagram, and some points may represent several data pairs, which are identical. Laboratories whose points are off the diagram will have a rating of ± 1 for that particular test.

As described in Crandall and Blaine, a tight circular pattern of points around the intersection of the median lines is the ideal situation. Stretching out of the pattern into the first (upper right) and third (lower left) quadrants, suggests some kind of bias, or tendency for laboratories to get high or low results on both samples. Examination of the scatter diagrams indicates strong evidence of bias on many tests.

CCRL PROFICIENCY SAMPLE PROGRAM

Concrete Proficiency Samples No. 179 and No. 180

Final Report – June 7, 2016

SUMMARY OF RESULTS

		Sar	nple No.17	79	Sar	nple No. 1	180
est (unit)	#Labs	Average	S.D.	C.V.	Average	S.D.	C.V.
Air Content -	- Volumetric N	lethod (perce	nt)				
	1235	2.06	0.45	22	2.44	0.49	20
	*1208	2.03	0.37	18	2.42	0.43	18
					1475, 1681, 18 , 3726, 3759, 3		2187, 2294, 2397
Air Content -	Pressure Me	thod (percent)				
	1436	2.0	0.42	21	2.4	0.46	19
	*1403	2.0	0.34	17	2.4	0.39	16
	3900, 4071 ncrete (inch)						
•	(-)						
	1445	2.94	1.11	38	2.87	1.12	39
	1445 *1396	2.94 2.85	1.11 0.98	38 34	2.87 2.78	1.12 0.97	39 35
1607, 1 3098, 3	*1396 bs Eliminated 803, 1839, 19	2.85 - 13, 188, 535, 80, 2058, 2114	0.98 894, 903, 7 I, 2149, 227	34 1027, 1046, 11 13, 2287, 2294	2.78	0.97 6, 1447, 14 720, 2936	35 65, 1564, 1593, , 3044, 3065,
1607, 1 3098, 3 4019, 4	*1396 bs Eliminated 803, 1839, 19 3145, 3169, 31	2.85 - 13, 188, 535, 80, 2058, 2114 72, 3220, 3252	0.98 894, 903, 7 I, 2149, 227	34 1027, 1046, 11 13, 2287, 2294	2.78 25, 1294, 1308 , 2509, 2678, 2	0.97 6, 1447, 14 720, 2936	35 65, 1564, 1593, , 3044, 3065,
1607, 1 3098, 3 4019, 4	*1396 bs Eliminated 803, 1839, 19 3145, 3169, 31 029, 4071	2.85 - 13, 188, 535, 80, 2058, 2114 72, 3220, 3252	0.98 894, 903, 7 I, 2149, 227	34 1027, 1046, 11 13, 2287, 2294	2.78 25, 1294, 1308 , 2509, 2678, 2	0.97 6, 1447, 14 720, 2936	35 65, 1564, 1593, , 3044, 3065,
1607, 1 3098, 3 4019, 4	*1396 bs Eliminated 803, 1839, 199 3145, 3169, 31 029, 4071 of Concrete (I	2.85 - 13, 188, 535, 80, 2058, 2114 72, 3220, 3252 b/ft³)	0.98 894, 903, 7 4, 2149, 227 2, 3487, 352	34 1027, 1046, 11 13, 2287, 2294 27, 3557, 3569	2.78 25, 1294, 1308 , 2509, 2678, 2), 3599, 3726, 3	0.97 6, 1447, 14 720, 2936 766, 3882	35 65, 1564, 1593, , 3044, 3065, , 3907, 3957,
1607, 1 3098, 3 4019, 4 Unit Weight * Lal 1534, 1 2743, 2	*1396 bs Eliminated - 803, 1839, 19 3145, 3169, 31 029, 4071 of Concrete (I 1441 *1384 bs Eliminated - 552, 1634, 16	2.85 - 13, 188, 535, 80, 2058, 2114 72, 3220, 3252 b/ft³) 148.5 148.4 - 48, 397, 404, 58, 1670, 1792 78, 3073, 3141	0.98 894, 903, ² 2, 2149, 22 ² 2, 3487, 352 2.5 1.2 467, 534, 8 2, 1856, 205 1, 3215, 32 ²	34 1027, 1046, 11 13, 2287, 2294 27, 3557, 3569 1.7 0.8 302, 884, 1037 54, 2211, 2287 18, 3224, 3352	2.78 25, 1294, 1308 25, 2509, 2678, 2 3, 3599, 3726, 3 147.2 147.1 7, 1168, 1221, 1 7, 2302, 2407, 2 2, 3389, 3527, 3	0.97 5, 1447, 14 720, 2936 766, 3882 2.2 1.2 223, 1294 452, 2457	35 65, 1564, 1593, , 3044, 3065, , 3907, 3957, 1.5 0.8 , 1308, 1428, , 2459, 2511,
1607, 1 3098, 3 4019, 4 Jnit Weight o * Lal 1534, 1 2743, 2 3685, 3	*1396 bs Eliminated 803, 1839, 19 3145, 3169, 31 029, 4071 of Concrete (I 1441 *1384 bs Eliminated 552, 1634, 16 936, 2961, 29 3703, 3804, 38	2.85 - 13, 188, 535, 80, 2058, 2114 72, 3220, 3252 b/ft³) 148.5 148.4 - 48, 397, 404, 58, 1670, 1792 78, 3073, 3141 17, 3879, 3929	0.98 894, 903, 7 9, 2149, 227 2, 3487, 352 2, 3487, 352 1.2 467, 534, 8 2, 1856, 205 1, 3215, 327 9, 3981, 395	34 1027, 1046, 11 13, 2287, 2294 27, 3557, 3569 1.7 0.8 302, 884, 1037 54, 2211, 2287 18, 3224, 3352 94, 4013, 4108	2.78 25, 1294, 1308 25, 2509, 2678, 2 3, 3599, 3726, 3 147.2 147.1 7, 1168, 1221, 1 7, 2302, 2407, 2 2, 3389, 3527, 3	0.97 5, 1447, 14 720, 2936 766, 3882 2.2 1.2 223, 1294 452, 2457	35 65, 1564, 1593, , 3044, 3065, , 3907, 3957, 1.5 0.8 , 1308, 1428, , 2459, 2511,
1607, 1 3098, 3 4019, 4 Unit Weight o * Lal 1534, 1 2743, 2 3685, 3	*1396 bs Eliminated 803, 1839, 19 145, 3169, 31 029, 4071 of Concrete (I 1441 *1384 bs Eliminated 552, 1634, 16 2936, 2961, 29	2.85 - 13, 188, 535, 80, 2058, 2114 72, 3220, 3252 b/ft³) 148.5 148.4 - 48, 397, 404, 58, 1670, 1792 78, 3073, 3141 17, 3879, 3929	0.98 894, 903, 7 9, 2149, 227 2, 3487, 352 2, 3487, 352 1.2 467, 534, 8 2, 1856, 205 1, 3215, 327 9, 3981, 395	34 1027, 1046, 11 13, 2287, 2294 27, 3557, 3569 1.7 0.8 302, 884, 1037 54, 2211, 2287 18, 3224, 3352 94, 4013, 4108	2.78 25, 1294, 1308 25, 2509, 2678, 2 3, 3599, 3726, 3 147.2 147.1 7, 1168, 1221, 1 7, 2302, 2407, 2 2, 3389, 3527, 3	0.97 5, 1447, 14 720, 2936 766, 3882 2.2 1.2 223, 1294 452, 2457	35 65, 1564, 1593, , 3044, 3065, , 3907, 3957, 1.5 0.8 , 1308, 1428, , 2459, 2511,

2139, 2154, 2163, 2287, 2294, 2299, 2302, 2509, 2511, 2720, 2743, 2857, 3019, 3044, 3045, 3352, 3385, 3469, 3685, 3882, 4013, 4015, 4023, 4029, 4041


CCRL PROFICIENCY SAMPLE PROGRAM

Concrete Proficiency Samples No. 179 and No. 180

Final Report – June 7, 2016

SUMMARY OF RESULTS

		San	nple No.17	79	Sam	ple No. 18	30	
Test (unit)	#Labs	Average	S.D.	C.V.	Average	S.D.	C.V.	
Compressiv	e Strength 4 x	8 - 7 day (psi)					
	1115	4645	380	8.2	4599	353	7.7	
	*1093	4663	314	6.7	4618	293	6.4	
	3385, 3491, 373 e Strength 6 x			9, 3962				
	328	4168	325	7.8	4250	305	7.2	
	*322	4174	310	7.4	4263	275	6.4	
* La	bs Eliminated -	1168, 1223, 1	638, 1987,	2269, 3989				
Temperature	e of Concrete	(° F)						
	1443	76	6	8.0	76	6	7.8	
No	Labs Eliminate	d for This Test						

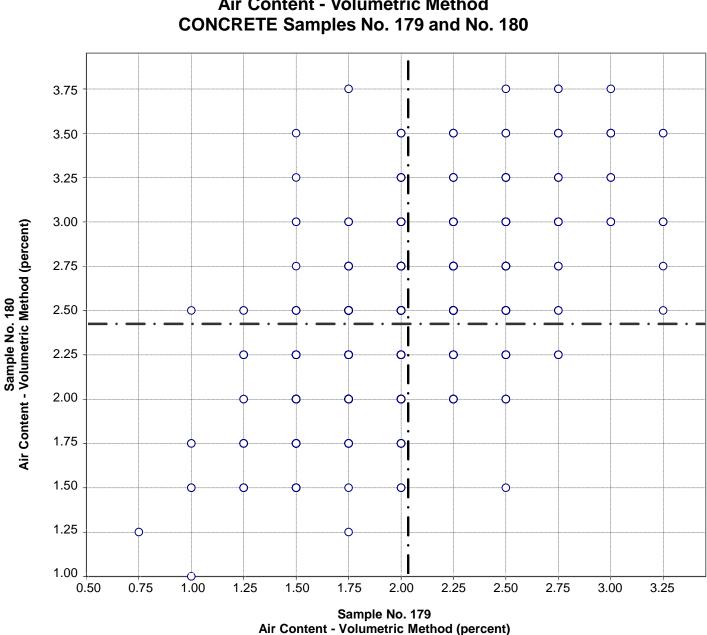


CCRL Proficiency Sample Program Air Content - Volumetric Method

Air Content - Volumetric Method Test No. 1 1208 Points

Sample No. 179 Ave 2.03 S.D. 0.37 C.V. 18 Ave 2.42 C.V. 18 Sample No. 180 S.D. 0.43

Labs Eliminated: 42, 173, 188, 1294, 1308, 1333, 1456, 1475, 1681, 1828, 2046, 2187, 2294, 2397, 2398, 2477, 2555, 2895, 2923, 2993, 3063, 3441, 3501, 3534, 3726, 3759, 3900

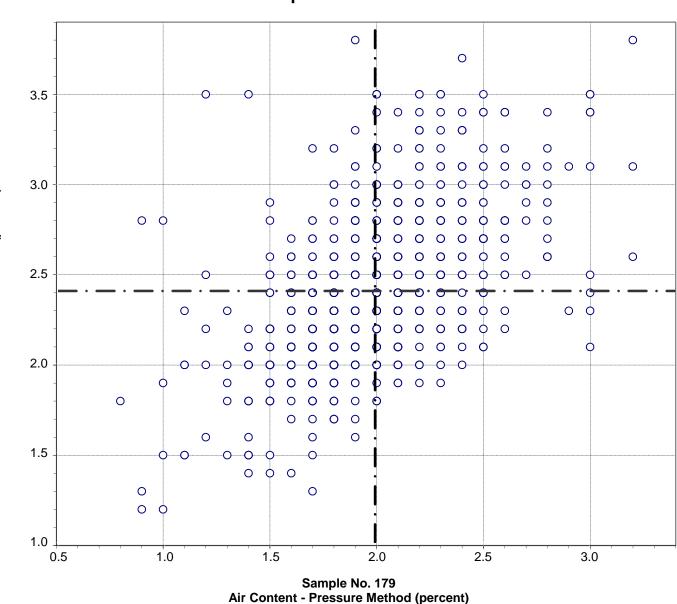


CCRL Proficiency Sample Program Air Content - Pressure Method CONCRETE Samples No. 179 and No. 180

Test No. 6 Air Content - Pressure Method 1403 Points

Sample No. 179 Ave 2.0 S.D. 0.34 C.V. 17 Sample No. 180 Ave 2.4 S.D. 0.39 C.V. 16

Labs Eliminated: 173, 188, 271, 471, 1037, 1294, 1308, 1333, 1475, 1562, 1832, 2187, 2287, 2294, 2366, 2397, 2398, 2717, 2923, 2993, 3003, 3063, 3215, 3223, 3441, 3527, 3557, 3604, 3726, 3759, 3874, 3900, 4071

Sample No. 180 Air Content - Pressure Method (percent)

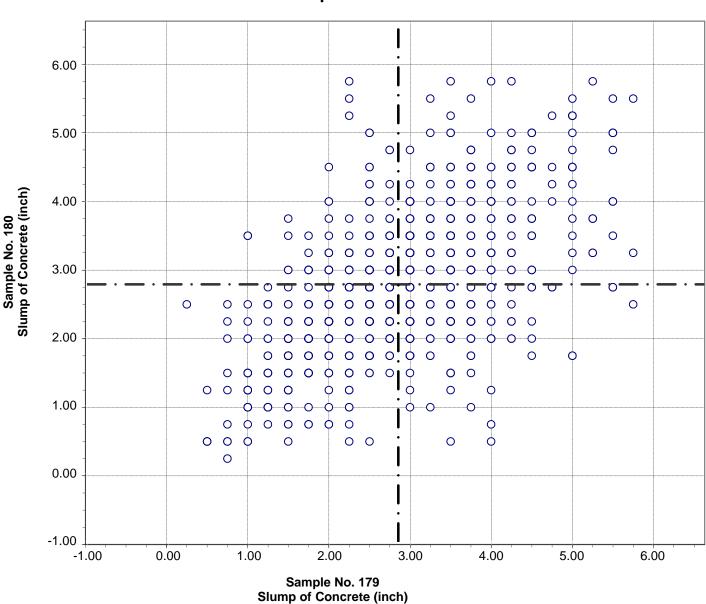


CCRL Proficiency Sample Program Slump of Concrete CONCRETE Samples No. 179 and No. 180

Test No. 2 Slump of Concrete 1396 Points

Sample No. 179 Ave 2.85 S.D. 0.98 C.V. 34 Sample No. 180 Ave 2.78 S.D. 0.97 C.V. 35


Labs Eliminated: 13, 188, 535, 894, 903, 1027, 1046, 1125, 1294, 1308, 1447, 1465, 1564, 1593, 1607, 1803, 1839, 1980, 2058, 2114, 2149, 2213, 2287, 2294, 2509, 2678, 2720, 2936, 3044, 3065, 3098, 3145, 3169, 3172, 3220, 3252, 3487, 3527, 3557, 3569, 3599, 3726, 3766, 3882, 3907, 3957, 4019, 4029, 4071

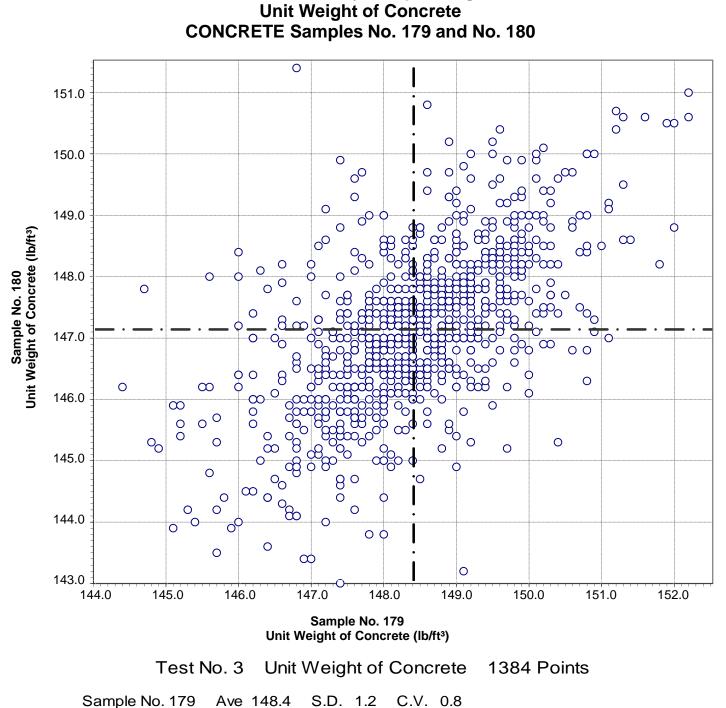

CCRL Proficiency Sample Program

Sample No. 180 Ave 147.1 S.D. 1.2 C.V. 0.8

Labs Eliminated: See SUMMARY OF RESULTS page for list of labs

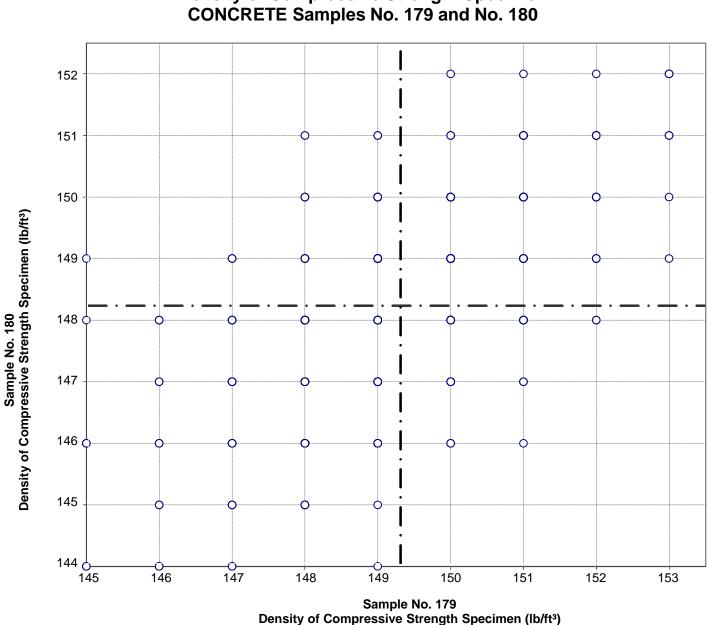


CCRL Proficiency Sample Program Density of Compressive Strength Specimen CONCRETE Samples No. 179 and No. 180

Test No. 7 Density of Compressive Strength Specimen 1237 Points

Sample No. 179 Ave 149 S.D. 1.3 C.V. 0.9 Sample No. 180 Ave 148 S.D. 1.3 C.V. 0.9

Labs Eliminated: 109, 116, 207, 271, 404, 459, 636, 907, 1078, 1168, 1294, 1428, 1731, 1832, 2139, 2154, 2163, 2287, 2294, 2299, 2302, 2509, 2511, 2720, 2743, 2857, 3019, 3044, 3045, 3352, 3385, 3469, 3685, 3882, 4013, 4015, 4023, 4029, 4041

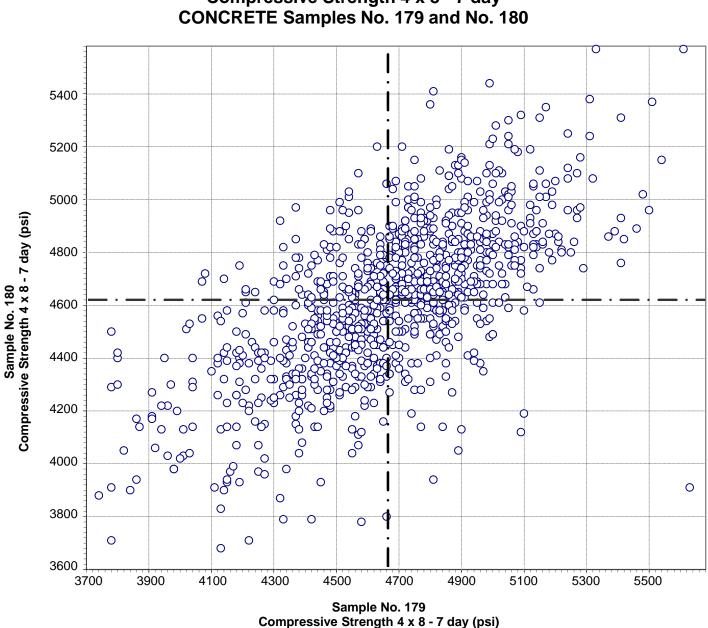


CCRL Proficiency Sample Program Compressive Strength 4 x 8 - 7 day CONCRETE Samples No. 179 and No. 180

Test No. 4 Compressive Strength 4 x 8 - 7 day 1087 Points

Sample No. 179 Ave 4663 S.D. 314 C.V. 6.7 Sample No. 180 Ave 4618 S.D. 293 C.V. 6.4

Labs Eliminated: 268, 471, 490, 1592, 1681, 2109, 2114, 2123, 2154, 2268, 2936, 3046, 3218, 3224, 3385, 3491, 3775, 3781, 3804, 3818, 3849, 3962

Labs off Diagram: 2398, 2791, 3599, 3698, 3789, 4025

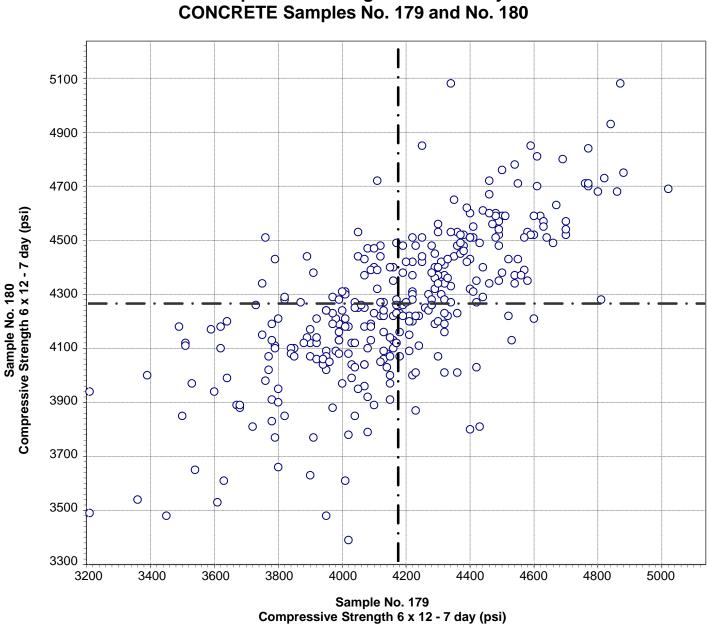


CCRL Proficiency Sample Program Compressive Strength 6 x 12 - 7 day CONCRETE Samples No. 179 and No. 180

 Test No. 4
 Compressive Strength 6 x 12 - 7 day
 322 Points

 Sample No. 179
 Ave 4174
 S.D. 310
 C.V. 7.4

 Sample No. 180
 Ave 4263
 S.D. 275
 C.V. 6.4

Labs Eliminated: 1168, 1223, 1638, 1987, 2269, 3989

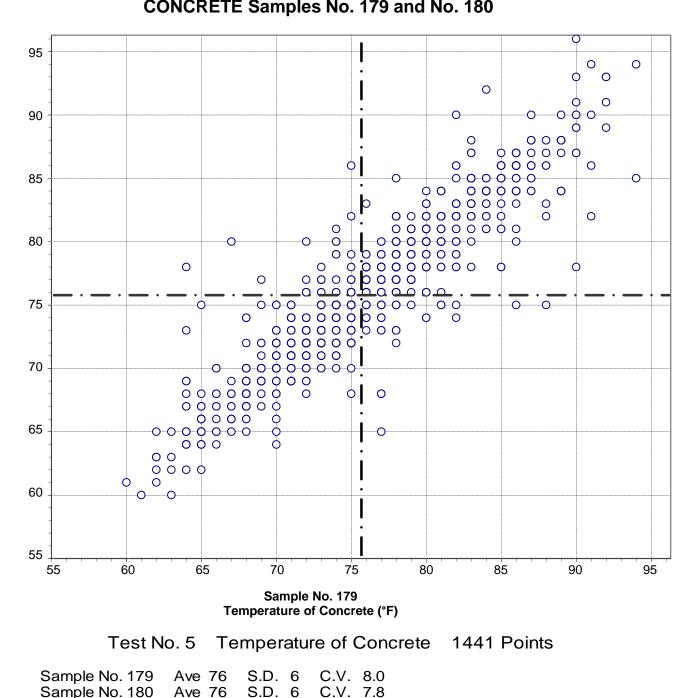

CCRL Proficiency Sample Program Temperature of Concrete CONCRETE Samples No. 179 and No. 180

Labs off Diagram: 3156, 3385

Sample No. 180 Temperature of Concrete (°F)